



STAINLESS PRO

UNVENTED MAINS PRESSURE
HOT WATER CYLINDERS



BUILT ON EXPERIENCE

The Gledhill brand has been synonymous with quality manufacturing and expertise for almost a century.

Our stainless steel hot water cylinders is the result of continuous product development and innovation; with Gledhill having produced unvented cylinders since their very inception.



25 YEAR WARRANTY



SOLAR PHOTOVOLTAIC



IMMERSION HEATER





CONTENTS

- 4. Stainless Pro Direct
- 6. Stainless Pro Indirect
- 8. Cylinder Washing Machine Frame
- 9. Our Area Sales Manager Map

STAINLESS PRO



DIRECT

90 | 120 | 150 | 180 | 210 | 250 | 300 LITRES

KEY FEATURES

- Designed with flat top to increase insulation
- Aligned tapping positions promote easier installation
- Colour matched components for visual appeal
- Wide base to improve unit stability
- Durable rubber connection labels and caps with foam retention
- External expansion allows for installation in height restricted areas and easier servicing
- Suitable for use with economy electricity tariffs to maximise efficiency



SOLAR PHOTOVOLTAIC




IMMERSION HEATER



WASHING MACHINE
FRAME COMPATIBLE
(SEE PAGE 8 FOR MORE DETAILS)

TECHNICAL SPECIFICATION

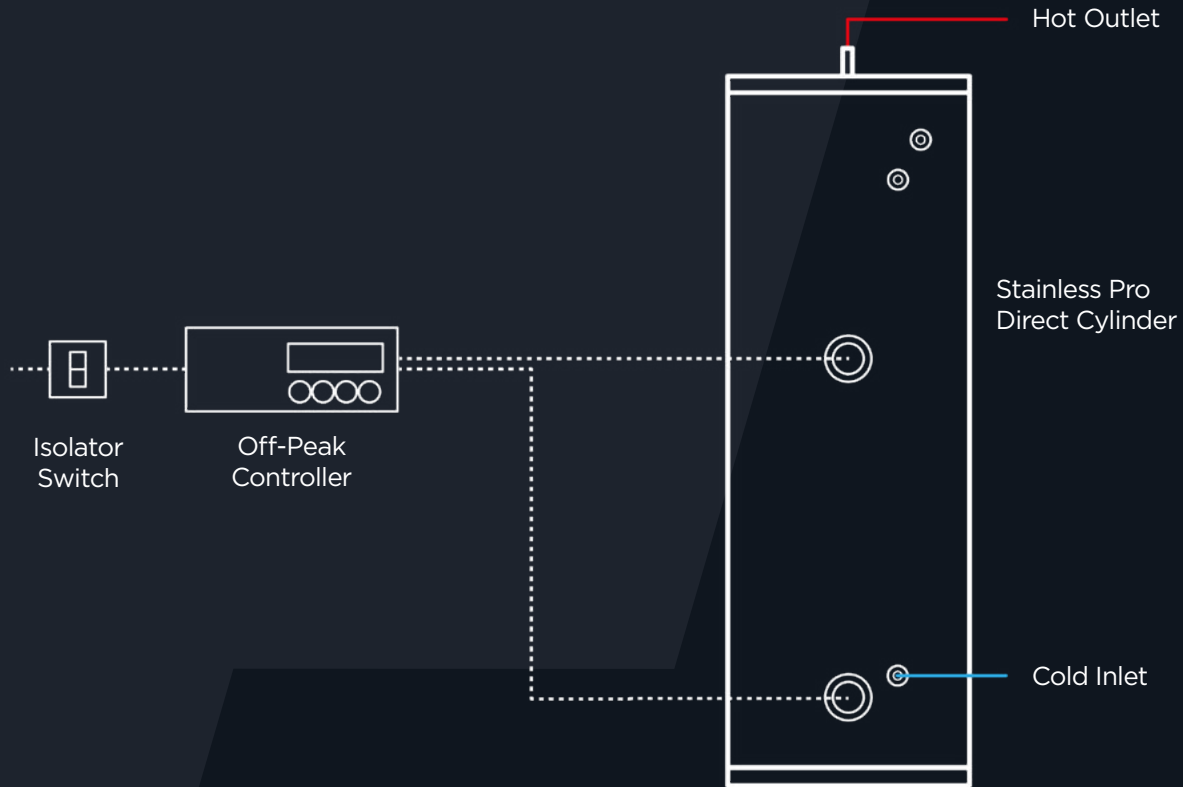

Description		D90	D120	D150	D180	D210	D250	D300
Product stock code		PRODR90	PRODR120	PRODR150	PRODR180	PRODR210	PRODR250	PRODR300
ErP		C	C	C	C	C	C	C
Load profile		L	L	L	L	L	L	L
Heat loss	watts	32	39	47	55	62	74	86
Heat loss (kW/24hr)	watts	0.77	0.94	1.13	1.32	1.49	1.78	2.06
Capacity	litres	91	119	148	178	208	248	287
Height	mm	764	931	1118	1306	1494	1744	1990
Diameter	mm	550	550	550	550	550	550	550
Empty weight	kg	18	21	25	28	32	36	41
Full weight	kg	109	140	173	206	240	284	328
Heat up time	min	90	119	150	179	209	249	299
Number of immersions		1	2	2	2	2	2	2
Secondary return		NO	NO	NO	NO	YES	YES	YES

NOTES:

- 1 Heat up time from 15°C to 60°C (applies to primary heat source only)
- 2 For further ErP information, please refer to the installation manual at gledhill.net
- 3 The schematics shown above are representational, please refer to the installation manual for full technical requirements

STAINLESS PRO



INDIRECT

90 | 120 | 150 | 180 | 210 | 250 | 300 LITRES

KEY FEATURES

- A and B ratings for sizes up to 210L
- Designed with flat top to increase insulation
- Aligned tapping positions promote easier installation
- Colour matched components for visual appeal
- Wide base to improve unit stability
- Durable rubber connection labels and caps with foam retention
- Corrugated coil provides increased heat transfer and prevention of scale build up
- External expansion allows for installation in height restricted areas and easier servicing



GAS OR OIL BOILERS




IMMERSION HEATER



WASHING MACHINE
FRAME COMPATIBLE
(SEE PAGE 8 FOR MORE DETAILS)

TECHNICAL SPECIFICATION

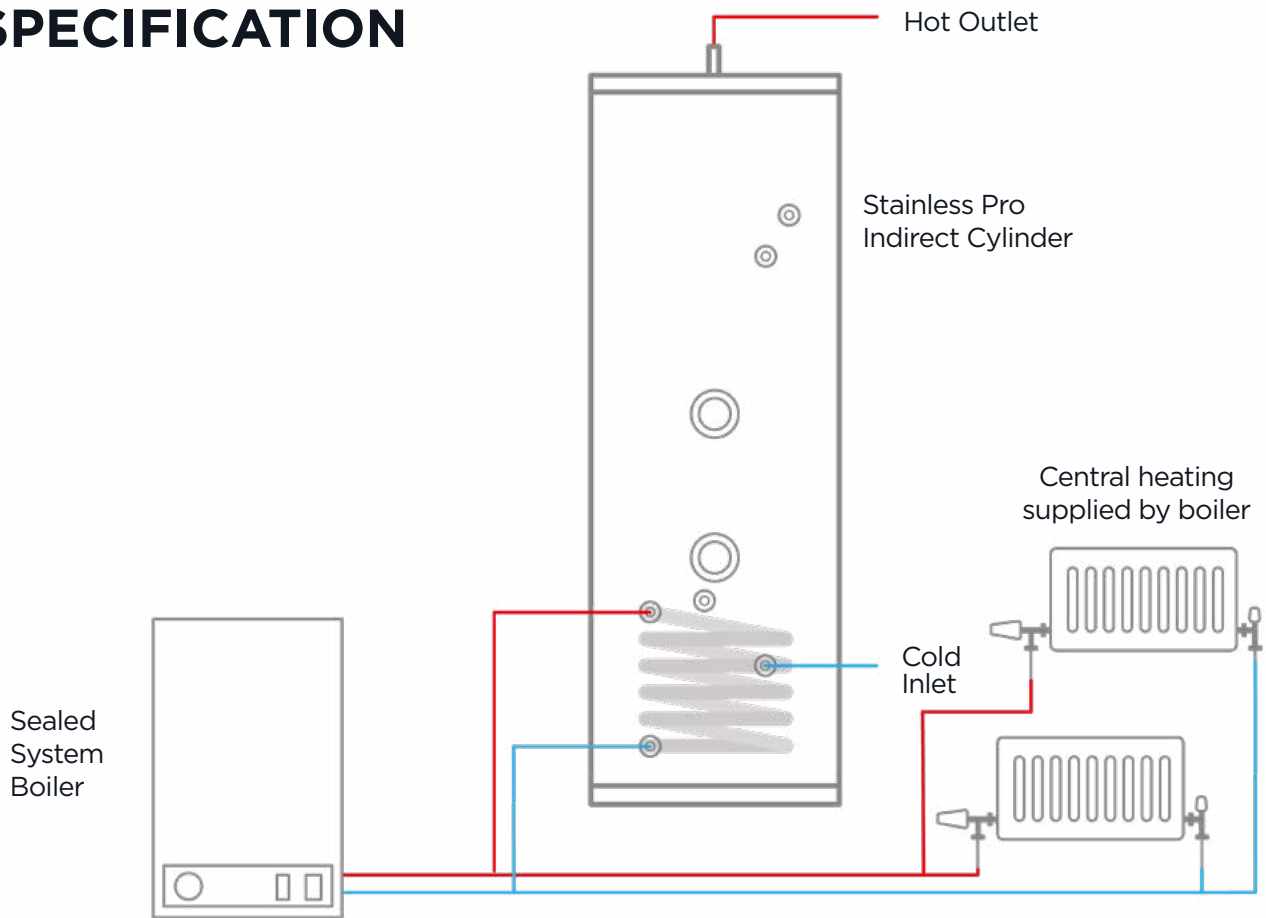

Description		IND90	IND120	IND150	IND180	IND210	IND250	IND300
Product stock code		PROIN90	PROIN120	PROIN150	PROIN180	PROIN210	PROIN250	PROIN300
ErP		A	B	B	B	B	C	C
Heat loss	watts	32	39	47	55	62	74	86
Heat loss (kW/24hr)	watts	0.77	0.94	1.13	1.32	1.49	1.78	2.06
Capacity	litres	91	119	148	178	208	248	287
Height	mm	764	931	1118	1306	1494	1744	1990
Diameter	mm	550	550	550	550	550	550	550
Empty weight	kg	20	23	26	30	33	38	43
Full weight	kg	111	142	174	208	241	286	330
Heat up time	min	17	21	25	30	32	36	38
Number of immersions		1	1	1	1	1	2	2
Secondary return		NO	NO	NO	NO	YES	YES	YES

NOTES:

- 1 Heat up time from 15°C to 60°C (applies to primary heat source only)
- 2 For further ErP information, please refer to the installation manual at gledhill.net
- 3 The schematics shown above are representational, please refer to the installation manual for full technical requirements

GLEDHILL CYLINDER WASHING MACHINE FRAME

COMPATIBLE WITH:
CYLINDERS BETWEEN 120L - 250L

Product Features:

The Gledhill washing machine frame **perfectly accommodates all** of our Platinum Direct cylinder sizes as well as over 50% of our Platinum Indirect cylinders. In addition, our washing machine frame is suitable for nearly all our Stainlesslite Plus 120L - 250L hot water cylinders as well as our Stainless ES and Gledhill Stainless Pro cylinders between 120L and 250L in size.

Designed with space saving efficiency in mind for new build homes as well as apartments our washing machine frame comes flat packed and when built up has a height of 910mm, width of 670mm and depth of 600mm making it the **perfect solution for any space restriction issue.**

- Engineered from steel for stability
- Accommodates 120L - 250L cylinder sizes
- Arrives flat packed and built in minutes
- Solution for space restrictions in new builds and apartment complexes
- Designed for all cylinder ranges including Platinum





SPARES

Gledhill products are manufactured to the highest quality standards. In the unlikely event that you require a spare part, you can contact Gledhill Spare Parts by calling;

01253 474412

or visit gledhill-spares.net

HERE TO HELP

If you're looking for technical assistance while you're on the job, give our technical team a call. With many years' experience, they're an invaluable resource to have at the end of the phone. For technical advice please call;

01253 474584

or visit gledhill.net

Gledhill Building Products Limited
Sycamore Estate,
Squires Gate,
Blackpool FY4 3RL

T: 01253 474550

E: enquiries@gledhill.net



FM 02057



GLEDHILL.NET /   

ONE NAME. EVERY SOLUTION.

Due to a programme of continuous improvement Gledhill Building Products reserves the right to modify products without prior notice. It is advisable to check the product technical detail by using the latest design and installation manuals available from our technical support team or on our website. It is an offence to copy or adapt this document without consent of the owner.